

A speed and departure time optimization algorithm for the Pollution-Routing Problem

Raphael Kramer

Dipartimento di Scienze e Metodi dell'Ingegneria
Università degli Studi di Modena e Reggio Emilia, Italy
raphael.kramer@unimore.it

Nelson Maculan

Departamento de Engenharia de Sistemas e Computação
Universidade Federal do Rio de Janeiro, Brazil
maculan@cos.ufrj.br

Anand Subramanian

Departamento de Engenharia de Produção
Universidade Federal da Paraíba, Brazil
anand@ct.ufpb.br

Thibaut Vidal

Departamento de Informática
Pontifícia Universidade Católica do Rio de Janeiro, Brazil
vidalt@inf.puc-rio.br

Working Paper – January 2015

Abstract

We propose a new speed and departure time optimization algorithm for the Pollution-Routing Problem (PRP) which runs in quadratic time. This algorithm is embedded into an iterated local search-based metaheuristic to achieve a combined speed, scheduling and routing optimization. Extensive computational experiments are conducted on classic PRP benchmark instances. Allowing delayed departure times from the depot significantly increases the search space, and contributes to reduce CO₂ emissions by 8.31% on the considered instances.

1 Introduction

The Pollution-Routing Problem (PRP) is a variant of the Vehicle Routing Problem with environmental considerations, introduced in Bektaş and Laporte (2011). The objective is to minimize operational and environmental costs subject to capacity and hard time-window constraints. In the PRP, the costs are mainly based on fuel consumption, which depends on many factors (e.g. distance traveled, vehicle load, level of CO₂ emissions, etc.), and driver wages. To our knowledge, the PRP was addressed by Demir *et al.* (2012), Kramer *et al.* (2015) and Dabia *et al.* (2014). Demir *et al.* (2012) proposed an adaptative large neighborhood search heuristic,

while Kramer *et al.* (2015) developed a matheuristic, integrating an iterated local search with a set-partitioning formulation. More recently, Dabia *et al.* (2014) put forward a branch-and-price algorithm for the PRP.

Vehicle-speed decisions play an important role in the PRP, since they do not only affect the total cost, but also the travel times between the locations, with a large impact on time-window feasibility. For this reason, most algorithms for the PRP perform – at regular times during the search – an optimization of vehicle speeds for the current routes. The resulting sub-problem, called speed optimization problem (SOP), seeks to find the most cost-efficient arc speeds on a given route while respecting arrival time constraints at each customer. In the considered vehicle routing application, the objective function is non-linear, based on fuel consumption and work duration.

Several speed-optimization algorithms are available in the literature (Demir *et al.*, 2012; Kramer *et al.*, 2015; Norstad *et al.*, 2011; Hvattum *et al.*, 2013). These algorithms run in quadratic time, consider identical cost/speed functions for each arc, and assume that the departure time at the origin is fixed. Considering the departure time as a decision variable may yield a significant cost reduction, but also increase resolution complexity. In Dabia *et al.* (2014), the departure time from the first customer is optimized by means of a golden section search, within a dynamic programming for column generation. Finally, Vidal *et al.* (2014) showed that the optimal solution of the SOP with arc-dependent speed/cost functions can be achieved by solving a hierarchy of resource allocation problems with nested constraints. Other works on SOP can be found in Norlund and Gribkovskaia (2013), Psaraftis and Kontovas (2014) and Lipp and Boyd (2014).

This article contributes to the resolution of difficult vehicle routing variants with speed and departure time optimization. We propose a simple polynomial algorithm for the SOP, which runs in quadratic time and also optimizes the departure time from the depot. This speed optimization algorithm is then embedded into a vehicle routing matheuristic to produce optimized routing plans. Computational experiments are performed on the PRPLIB instances presented in Demir *et al.* (2012) and Kramer *et al.* (2015), to assess the impact of departure time optimization. The results highlight very significant routing cost reduction, of 8.31% on average, when comparing to the best known solutions of the original PRP. The computation time of the new metaheuristic remains comparable to current state-of-the-art methods despite the fact that it deals with a more general problem.

2 Problem Description

The PRP is defined as follows. Let $G = (\mathcal{V}, \mathcal{A})$ be a complete and directed graph with a set $\mathcal{V} = \{0, 1, 2, \dots, n\}$ of vertices and a set $\mathcal{A} = \{(i, j) : i, j \in \mathcal{V}, i \neq j\}$ of arcs. Vertices $\mathcal{V}' = \{1, 2, \dots, n\}$ correspond to the customers, while vertex $\{0\}$ represents the depot. A set $K = \{1, 2, \dots, m\}$ of vehicles with capacity Q is available to serve the customers. Each customer

$i \in \mathcal{V}'$ has a non-negative demand q_i , specified time-window interval $[a_i, b_i]$ to be served and a service time τ_i . Demand, departure time and service time from depot are assumed to be zero. Each arc $(i, j) \in \mathcal{A}$ represents a travel possibility from node i to j for a distance d_{ij} , which can be traveled with any speed v_{ij} in the interval $[v_{min}, v_{max}]$.

The traveling speed is directly proportional to the environmental costs and inversely proportional to the operational costs, respectively. Therefore, the PRP aims at determining a speed matrix $(\mathbf{v})_{ij}$ for the arcs and a set of routes $\mathbf{R}$ (such that $|\mathbf{R}| \leq m$) to serve all customers while minimizing environmental and operational costs, satisfying the constraints of the well known vehicle routing problem with time windows, that is, each route must start and ends at the depot, every customer must be visited within its time-window and the sum of customers demand of each route cannot exceed the vehicle capacity.

Let $\sigma = (\sigma_1, \sigma_2, \dots, \sigma_{|\sigma|})$ be a route, $f_{\sigma_i \sigma_{i+1}}$ be the vehicle load on arc (σ_i, σ_{i+1}) and t_{σ_i} be the arrival time at customer σ_i . The environmental cost is proportional to the fuel consumption, which is computed according to Equation (1), where w_1, w_2, w_3, w_4 are parameters based on fuel properties, vehicle and network characteristics. On the other hand, the operational costs (driver salaries) are proportional to route duration. Defining ω_{FC} as the fuel cost per liter and ω_{FD} as the driving cost per second, the overall PRP cost – to be minimized – can be computed as in Equation (2).

$$F_{\sigma_i \sigma_{i+1}}^F(v_{\sigma_i \sigma_{i+1}}) = d_{\sigma_i \sigma_{i+1}} \left(\frac{w_1}{v_{\sigma_i \sigma_{i+1}}} + w_2 + w_3 f_{\sigma_i \sigma_{i+1}} + w_4 v_{\sigma_i \sigma_{i+1}}^2 \right) \quad (1)$$

$$Z_{PRP}(\mathbf{R}, \mathbf{v}) = \sum_{\sigma \in \mathbf{R}} \left(\omega_{FC} \sum_{i=1}^{|\sigma|-1} F_{\sigma_i \sigma_{i+1}}^F(v_{\sigma_i \sigma_{i+1}}) + \omega_{FD} t_{\sigma_{|\sigma|}} \right) \quad (2)$$

Notice that the operational cost is computed based only on the time $t_{\sigma_{|\sigma|}}$ in which the vehicle returns to depot (i.e. the departure time from the depot is equal to zero). When a late departure time from the depot is allowed, the PRP cost function is defined as in Equation (3). Thus, the time t_{σ_1} at which the vehicle departs from the depot becomes a decision variable, making the problem more difficult.

$$Z_{PRP}(\mathbf{R}, \mathbf{v}) = \sum_{\sigma \in \mathbf{R}} \left(\omega_{FC} \sum_{i=1}^{|\sigma|-1} F_{\sigma_i \sigma_{i+1}}^F(v_{\sigma_i \sigma_{i+1}}) + \omega_{FD} (t_{\sigma_{|\sigma|}} - t_{\sigma_1}) \right) \quad (3)$$

3 The proposed speed and departure time optimization algorithm

The fuel consumption per distance unit $F_{\sigma_i \sigma_{i+1}}^F(v_{\sigma_i \sigma_{i+1}})$ is a convex function. The speed value v_F^* that minimizes fuel costs is given in Equation (4). Similarly, for any arc (σ_i, σ_{i+1}) , assuming that there is no waiting time in the route after σ_i , the speed value v_{FD}^* that minimizes fuel and

driver costs is expressed in Equation (5). Both values, v_F^* and v_{FD}^* , are independent of the arc under consideration.

$$\frac{dF_{\sigma_i\sigma_{i+1}}^F}{dv_{\sigma_i\sigma_{i+1}}}(v_F^*) = 0 \Leftrightarrow v_F^* = \left(\frac{w_1}{2w_4}\right)^{1/3} \quad (4)$$

$$v_{FD}^* = \left(\frac{\frac{\omega_{FD}}{\omega_{FC}} + w_1}{2w_4}\right)^{1/3} \quad (5)$$

Given a route σ , the speed and departure time optimization problem consists of finding the departure time from the first location (i.e., the depot when dealing with vehicle routing problems) and the optimal speeds for each arc while respecting customers' time-windows. In order to solve this problem, we propose a recursive algorithm that extends those presented in Demir *et al.* (2012); Kramer *et al.* (2015); Hvattum *et al.* (2013).

The proposed approach can be generally viewed as a divide-and-conquer strategy, which iteratively solves a relaxed speed optimization problem obtained by ignoring time windows at intermediate destinations. If the resulting solution satisfies all constraints, then it is returned. Otherwise the customer p with maximum time-window violation is identified and its arrival time is set to its closest feasible value. Fixing this decision variable creates two sub-problems which are recursively solved (Alg. 1, Line 20-21).

Algorithm 1 is first applied on a given route σ by setting the “start” s to 1 and the “end” e to $|\sigma|$. We recall that the departure time and return time to the depot are considered as decision variables. In this first iteration, still, the departure time is set to the earliest possible value $t_{\sigma_1} = a_{\sigma_1}$ (Alg. 1, Line 6). This decision will be revised later on. From this starting time, the arrival time at each customer is derived as in Kramer *et al.* (2015): at first, the arrival time at the last customer when traveling at speed v_{FD}^* is determined and, in case of violation, updated to its closest time-window bound (Alg. 1, Line 8). Such arrival time leads to a reference speed v_{REF} on the route (Alg. 1, Line 11) which will be used to compute the arrival time at each customer as well as the maximum time-window violation (Alg. 1, Lines 12-17).

In case of violation, two subproblems will be recursively solved. Any subproblem starting at the depot is now solved without fixing the departure time to a_{σ_1} (as opposed to the method presented in Kramer *et al.* (2015)). Indeed, the arrival time to the last customer of this subproblem is already fixed. It is thus possible to evaluate the reference speed “backwards”, deriving the best departure time at the depot (Alg. 1, Line 10), and the arrival time at each customer. The other sub-problems are solved in a similar manner. For these cases, the starting date – and possibly the arrival date to the last customer or depot – are already set. The recursion is repeated until no violation is found.

Finally, once arrival times t_{σ_i} are known for all customers $i = 1, \dots, |\sigma|$, the associated speeds are revised in such a way that any speed below v_F^* is replaced by v_F^* and a waiting time (Alg. 1, Lines 22-24).

Figure 1 shows an execution example of the presented algorithm in a route involving seven

nodes. The horizontal lines represent the customers and the brackets their corresponding time windows. Bullet points indicate the arrival times. The best departure and arrival times of this example are depicted in Figure 1.e.

Algorithm 1 Speed and Departure Time Optimization Algorithm — SDTOA

```

1: Procedure  $SDTOA(\sigma, s, e)$ 
2:  $p \leftarrow violation \leftarrow maxViolation \leftarrow 0$ 
3:  $D \leftarrow \sum_{i=s}^{e-1} d_{\sigma_i, \sigma_{i+1}}$ 
4:  $T \leftarrow \sum_{i=s}^{e-1} \tau_{\sigma_i}$ 
5: if  $s = 1$  and  $e = |\sigma|$  then
6:    $t_{\sigma_1} = a_{\sigma_1}$ 
7: if  $e = |\sigma|$  then
8:    $t_{\sigma_e} = \min\{\max\{a_{\sigma_e}, t_{\sigma_s} + D/v_{FD}^* + T\}, b_{\sigma_e}\}$ 
9: if  $s = 1$  then
10:   $t_{\sigma_s} = \min\{\max\{a_{\sigma_s}, t_{\sigma_e} - D/v_{FD}^* - T\}, b_{\sigma_s}\}$ 
11:   $v_{REF} \leftarrow D/(t_{\sigma_e} - t_{\sigma_s} - T)$ 
12:  for  $i = s + 1 \dots e$  do
13:     $t_{\sigma_i} = t_{\sigma_{i-1}} + \tau_{\sigma_{i-1}} + d_{\sigma_{i-1}, \sigma_i}/v_{REF}$ 
14:     $violation = \max\{0, t_{\sigma_i} - b_{\sigma_i}, a_{\sigma_i} - t_{\sigma_i}\}$ 
15:    if  $violation > maxViolation$  then
16:       $maxViolation = violation$ 
17:       $p = i$ 
18: if  $maxViolation > 0$  then
19:    $t_{\sigma_p} = \min\{\max\{a_{\sigma_p}, t_{\sigma_p}\}, b_{\sigma_p}\}$ 
20:    $SDTOA(\sigma, s, p)$ 
21:    $SDTOA(\sigma, p, e)$ 
22: if  $s = 1$  and  $e = |\sigma|$  then
23:   for  $i = 2 \dots |\sigma|$  do
24:      $v_{\sigma_{i-1}, \sigma_i} = \max\{d_{\sigma_{i-1}, \sigma_i}/(t_{\sigma_i} - t_{\sigma_{i-1}} - \tau_{\sigma_{i-1}}), v_F^*\}$ 

```

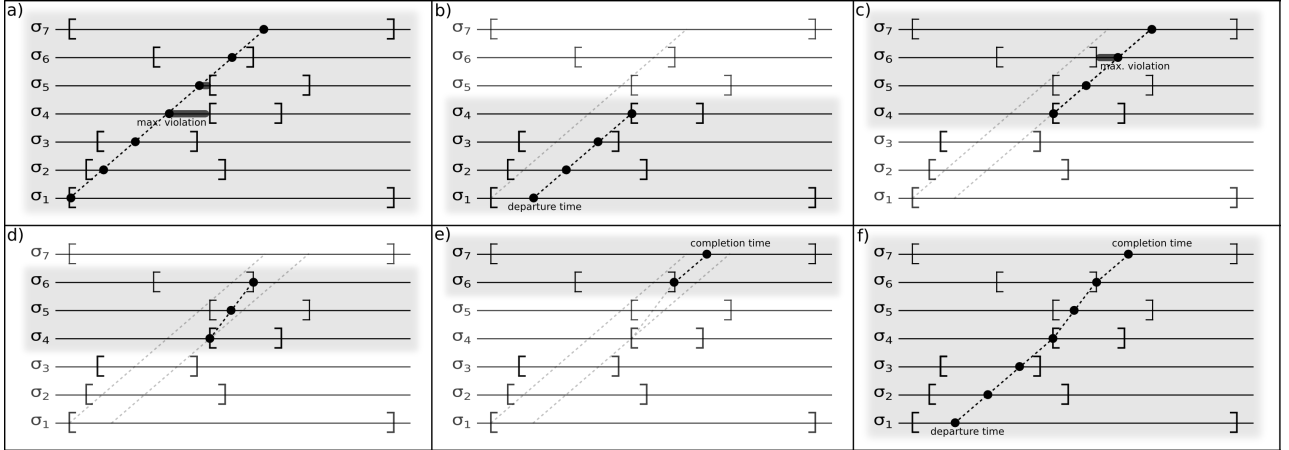


Figure 1: Computing departure time and arrival times with SDTOA

4 Computational Results

The proposed algorithm was integrated into the ILS-SP-SOA matheuristic of Kramer *et al.* (2015), which makes use of an adaptive speed matrix through the search to keep track of speed

decisions. Instead of SOA, the SDTOA is executed on each route associated to a local optimal solution found by the ILS, returning routes with optimized speeds and departure times. These routes are stored in a pool that are further combined together by means of integer programming over a set partitioning (SP) formulation.

We tested the method on the instances suggested in Demir *et al.* (2012) (PRPLIB) and Kramer *et al.* (2015), ranging from 10 to 200 customers. The same values as in Demir *et al.* (2012) and Kramer *et al.* (2015) have been used for the objective function, that is: $w_1 = 1.01763908 \times 10^{-3}$; $w_2 = 5.33605218 \times 10^{-5}$; $w_3 = 8.40323178 \times 10^{-9}$; $w_4 = 1.41223439 \times 10^{-7}$; $\omega_{FC} = 1.4\text{£}/l$ e $\omega_{FD} = 2.22222222 \times 10^{-3}\text{£}/s$. The algorithm was implemented in C++ and executed on a Intel Core i7 3.40 GHz processor with 16 GB of RAM, running under Linux Mint 13. The SP problems were solved using CPLEX 12.4. Only a single thread was used and the algorithm was run 10 times for each instance. Table 1 displays a summary of the results, reporting the average solution on ten runs. Results are compared with those of the current state-of-the-art Kramer *et al.* (2015), where late departure times from the depot are not allowed. Each line corresponds to averaged results on a set of 20 instances. The Gap(%) for each instance is computed as $100(Z - Z_{BKS})/Z_{BKS}$, where Z is the objective value of the solution and Z_{BKS} is the value of the Best Known Solution (BKS) for the PRP without late departures from depot. The results show that when allowing departure times from the depot, one can obtain a considerable reduction on the total costs. More specifically, a reduction of 8.31% was achieved on average, and instances with tighter time-windows (sets B and C) tend to be more prone for solution quality improvement based on delays at the depot as can be seen in Figure 2.

Table 1: Results for the PRP with late departures from depot

Instance	ILS-SP-SDTOA				BKS for PRP
	Avg. Cost	CPU T(s)	Best Cost	Gap(%)	
10-A	183.14	0.04	183.06	-1.32	185.50
10-B	248.22	0.04	247.88	-11.83	281.15
10-C	195.21	0.04	195.08	-12.19	222.16
50-A	601.18	3.16	600.26	-1.55	609.71
50-B	771.03	4.76	770.29	-9.37	849.96
50-C	672.86	4.77	671.83	-11.07	755.44
100-A	1105.12	36.20	1102.83	-1.46	1119.17
100-B	1386.35	69.57	1384.70	-9.86	1536.19
100-C	1228.35	61.13	1226.13	-12.33	1398.56
200-A	1951.74	340.71	1944.75	-1.02	1964.81
200-B	2345.41	782.76	2334.08	-13.20	2688.90
200-C	2114.28	482.29	2103.18	-14.54	2461.05
Avg.	1066.91	148.79	1063.67	-8.31	1172.72

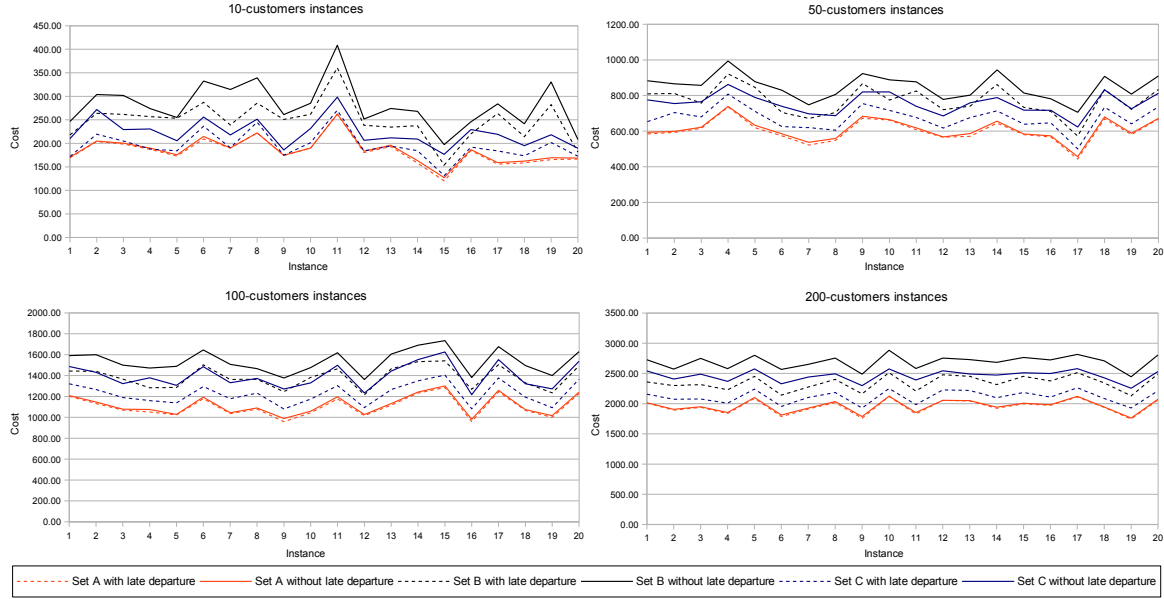


Figure 2: Costs comparison

5 Conclusions

A new speed and departure time optimization algorithm (SDTOA) for the PRP has been presented. This algorithm is conceptually simple and requires a quadratic time as a function of the number of destinations. It was implemented and integrated in ILS-SP-SOA metaheuristic of Kramer *et al.* (2015), where speed and departure time optimization occurs for each local minimum of the iterated local search. Our experimental results with this metaheuristic framework showed that allowing departure times from the depot can lead to very significant savings: 8.16% of fuel costs and driver wages in average for the considered benchmark instances.

Overall, integrated scheduling, speed control, and routing optimization techniques can help to reduce costs and environmental fingerprints in logistic systems and a variety of other industrial domains. The proposed methodology has contributed to efficiently address some open challenges such as joint departure time and speed optimization. Further research can now be focused on generalizing these methods to broader application classes. In particular, arc-dependent cost/speed functions are very relevant for ship speed optimization when traveling into locations with variable weather and sea conditions, but no efficient algorithm is currently known for this setting.

Acknowledgments

This research was partially supported by the Instituto Nacional de Ciência e Tecnologia (INCT) and by the Conselho Nacional de Desenvolvimento Científico e Tecnológico (CNPq), grants 557128/2009-9 and 471158/2012-7.

References

- Bektaş, T. and Laporte, G. (2011), The pollution-routing problem. *Transportation Research Part B: Methodological*, v. 45, n. 8, p. 1232–1250.
- Dabia, S., Demir, E. and van Woensel, T. An exact approach for the pollution-routing problem. Relatório técnico, Beta Research School for Operations Management and Logistics, 2014.
- Demir, E., Bektaş, T. and Laporte, G. (2012), An adaptive large neighborhood search heuristic for the pollution-routing problem. *European Journal of Operational Research*, v. 223, n. 2, p. 346–359.
- Hvattum, L. M., Norstad, I., Fagerholt, K. and Laporte, G. (2013), Analysis of an exact algorithm for the vessel speed optimization problem. *Networks*, v. 62, n. 2, p. 132–135.
- Kramer, R., Subramanian, A., Vidal, T. and Cabral, L. A. F. (2015), A matheuristic approach for the pollution-routing problem. *European Journal of Operational Research*. Forthcoming.
- Lipp, T. and Boyd, S. (2014), Minimum-time speed optimisation over a fixed path. *International Journal of Control*, v. 87, n. 6, p. 1297–1311.
- Norlund, E. K. and Gribkovskaia, I. (2013), Reducing emissions through speed optimization in supply vessel operations. *Transportation Research Part D: Transport and Environment*, v. 23, n. 0, p. 105–113.
- Norstad, I., Fagerholt, K. and Laporte, G. (2011), Tramp ship routing and scheduling with speed optimization. *Transportation Research Part C: Emerging Technologies*, v. 19, n. 5, p. 853 – 865.
- Psaraftis, H. N. and Kontovas, C. A. (2014), Ship speed optimization: Concepts, models and combined speed-routing scenarios. *Transportation Research Part C: Emerging Technologies*, v. 44, n. 0, p. 52–69.
- Vidal, T., Jaillet, P. and Maculan, N. (2014), A decomposition algorithm for nested resource allocation problems. *Computing Research Repository*, v. abs/1404.6694.